

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 5 TOWNSHIP 16 RANGE 5
DATE: 1-15-04
PARTY CHIEF: Wilcoxen
CREW: TYPE OF MARKER: Mag nail w/brass washer
METHOD OF ESTABLISHMENT: County:

IN. S.P.C. E ZONE NAD '83
NAME: 16050504
N: 512320.0704(m)
E: 70581.5619(m)



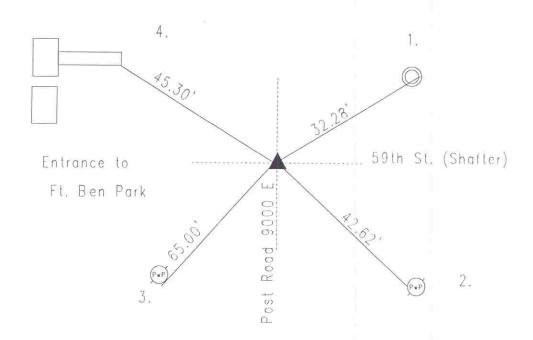

Original post set 1820 by Hendricks with witness: 12" beech N 65 E 12 links; 6" poplar S 13 W 9 links per Marion County Atlas pg. 15. 11-19-96 Wilcoxen called railroad spike per Schneider Engineering survey of Ft. Benjamin Harrison. Excavated 7-26-98 by Wilcoxen and railroad spike found at surface. Harrison was set. Re-tied 1-15-04 by Wilcoxen.

16050504

REF.	DISTANCE	DESCRIPTION
1	32.28'	Cut 'x' E-edge of manhole rim
2.	42.62'	PK nail W PwP#527-351A 3"up
3.	65.00'	PK nail SE PwP#482-351 36"up
4.	45.30'	SE top slab corner of stone wall